



SR35⁺™

Roof deck profile

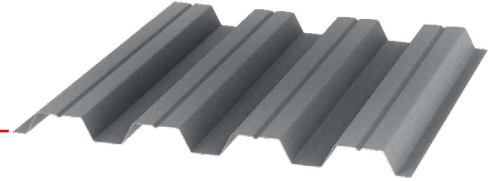

Deck profile

35mm deck profile typically used as the structural deck for Single Ply Membrane, Double Skin built-up, Standing Seam, Green Roof and Asphalt systems. Also available as part of the Protex Insulated System.

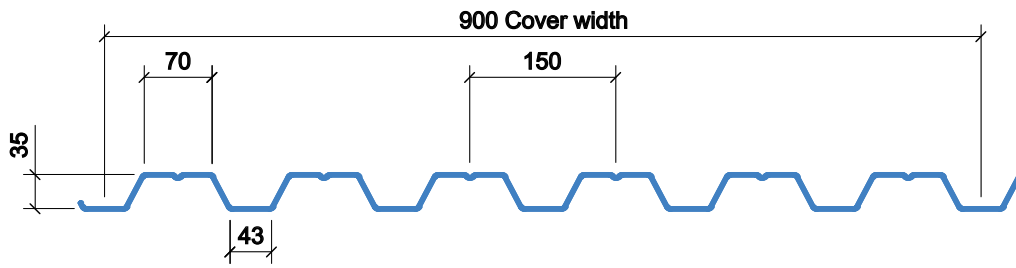

Options

- S350 grade steel in accordance with BS EN 10143:2016 and BS EN 10346:2015
- Available in two coating options:-
 - Galvanised** Hot dip galvanised with a minimum coating mass of 275g/m² (S350GD-Z275)
 - Polyester White** Hot dip galvanised with a minimum coating mass of 150g/m² (S350GD-Z150) with 25 micron bright white polyester finish to the underside
- 0.7mm, 0.9mm and 1.2mm gauge options available to suit common purlin spacings.
- Maximum sheet lengths up to 12m in packs of 10-35 sheets to suit project specific details

Profile properties

Nominal Thickness mm	Available Grade N/mm ²	Depth of Profile mm	Weight kg/m ²	Weight kN/m ²	Area of Steel (mm ² /m)	Top Flange in Compression		Bottom Flange in Compression	
						Moment Capacity kNm/m	Moment of Inertia cm ⁴ /m	Moment Capacity kNm/m	Moment of Inertia cm ⁴ /m
0.7	S350	35	7.58	0.07	895	3.42	20.1	2.95	19.8
0.9	S350	35	9.76	0.09	1166	4.26	23.5	4.16	22.4
1.2	S350	35	13.03	0.13	1572	7.45	35.7	6.60	35.7

Section properties are calculated assisted by testing in accordance with Eurocode 3.

Load tables

Positive Imposed Load (Gravity) kN/m²

		Span m																
Span Condition	Gauge	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8
Single	0.7	9.38	7.37	5.90	4.80	3.96	3.30	2.78	2.36	2.03	1.75	1.52	1.33	1.17	1.04	0.92	0.82	0.74
	0.9	10.98	8.63	6.91	5.62	4.63	3.86	3.25	2.77	2.37	2.05	1.78	1.56	1.37	1.21	1.08	0.96	0.86
	1.2	16.64	13.09	10.48	8.52	7.02	5.85	4.93	4.19	3.59	3.10	2.70	2.36	2.08	1.84	1.64	1.46	1.31
Double	0.7	5.59	4.99	4.48	4.05	3.69	3.37	3.09	2.85	2.63	2.44	2.27	2.12	1.98	1.86	1.75	1.62	1.45
	0.9	8.62	7.67	6.88	6.20	5.63	5.13	4.70	4.32	3.95	3.41	2.97	2.60	2.29	2.02	1.80	1.61	1.44
	1.2	14.47	12.85	11.49	10.35	9.37	8.53	7.80	7.16	6.60	6.10	5.58	4.88	4.30	3.80	3.38	3.02	2.71
Multi	0.7	6.59	5.90	5.31	4.81	4.38	4.01	3.68	3.40	3.15	2.92	2.72	2.54	2.31	2.04	1.81	1.62	1.45
	0.9	10.22	9.11	8.18	7.39	6.71	6.13	5.42	4.61	3.95	3.41	2.97	2.60	2.29	2.02	1.80	1.61	1.44
	1.2	17.18	15.29	13.70	12.36	11.21	10.21	9.35	8.60	7.43	6.42	5.58	4.88	4.30	3.80	3.38	3.02	2.71

Negative Imposed Load (Uplift) kN/m²

		Span m																
Span Condition	Gauge	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2	2.1	2.2	2.3	2.4	2.5	2.6	2.7	2.8
Single	0.7	9.46	8.73	7.74	6.29	5.18	4.32	3.64	3.10	2.65	2.29	1.99	1.75	1.54	1.36	1.21	1.08	0.97
	0.9	13.93	10.96	8.77	7.13	5.88	4.90	4.13	3.51	3.01	2.60	2.26	1.98	1.74	1.54	1.37	1.22	1.10
	1.2	22.23	17.48	14.00	11.38	9.38	7.82	6.59	5.60	4.80	4.15	3.61	3.16	2.78	2.46	2.19	1.95	1.75
Double	0.7	5.92	5.30	4.78	4.33	3.95	3.61	3.32	3.07	2.84	2.64	2.46	2.30	2.15	2.02	1.90	1.79	1.61
	0.9	8.72	7.76	6.96	6.28	5.70	5.20	4.76	4.38	4.04	3.74	3.47	3.24	2.90	2.57	2.28	2.04	1.83
	1.2	15.30	13.62	12.21	11.02	9.99	9.11	8.35	7.67	7.08	6.56	6.01	5.26	4.63	4.10	3.64	3.25	2.92
Multi	0.7	6.96	6.24	5.64	5.12	4.67	4.29	3.95	3.65	3.38	3.15	2.94	2.75	2.56	2.27	2.01	1.80	1.61
	0.9	10.32	9.20	8.27	7.47	6.79	6.20	5.69	5.24	4.84	4.33	3.77	3.30	2.90	2.57	2.28	2.04	1.83
	1.2	18.11	16.15	14.51	13.11	11.92	10.88	9.98	9.19	8.00	6.91	6.01	5.26	4.63	4.10	3.64	3.25	2.92

Tables consider deflection limits of:-

- Positive load (Gravity) - Span /200
- Negative loads (Uplift) - Span /150

All loads within table consider a partial factor of 1.5.

Fixing checks for uplift must be considered separately.

Tables based on bearing width (purlin) of 60mm.

Figures shaded indicate where design is governed by deflection.

These tables do not consider loads applied during construction of the roof finish - additional load-distributing measures may be required in some situations.

These load/span tables do not consider plastic design (moment redistribution). Improved loadings may be possible for some double and multi-span configurations. Contact SMD Technical Team for further guidance.

Download the latest version, now with roof deck design capability



Watch SMD's YouTube tutorial on the new roof deck section of Elements



www.smdstockyards.co.uk

Brentwood London
 Tel: +44 (0) 1277 812490
 Email: alan@smdstockyards.co.uk
 Unit 27, Childerditch Industrial Park,
 Little Warley, Essex CM13 3HD
 Fax: +44 (0) 1277 812491

Ashbourne Midlands
 Tel: +44 (0) 1335 300999
 Email: jade@smdstockyards.co.uk
 Moor Farm Road West, The Airfield,
 Ashbourne, Derbyshire DE6 1HD
 Fax: +44 (0) 1335 300888

Leeds Northern
 Tel: +44 (0) 1202 714990
 Email: kevin@smdstockyards.co.uk
 Calderbank, River Street, Brighouse,
 West Yorkshire HD6 1LU
 Fax: +44 (0) 1202 714980

Coatbridge Scotland
 Tel: +44 (0) 1698 622202
 Email: kevin@smdstockyards.co.uk
 12 Palacecraig Street, Coatbridge,
 North Lanarkshire ML5 4RY
 Fax: +44 (0) 1202 714980