



## SR30<sup>+</sup>™

### Roof deck profile

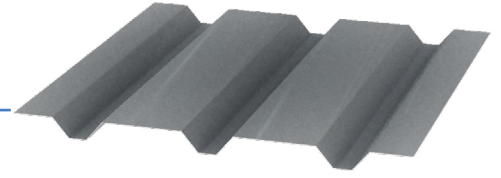

### Deck profile

30mm deck profile typically used as the structural deck for Single Ply Membrane, Double Skin built-up, Standing Seam, Green Roof and Asphalt systems. Also available as part of the Protex Insulated System.

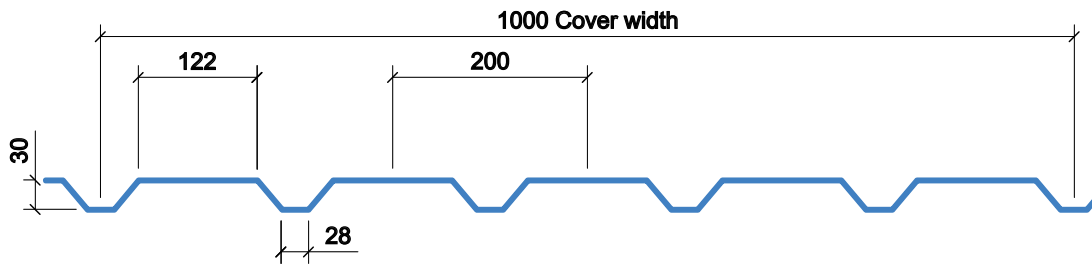

### Options

- S350 grade steel in accordance with BS EN 10143:2016 and BS EN 10346:2015
- Available in two coating options:-
  - Galvanised** Hot dip galvanised with a minimum coating mass of 275g/m<sup>2</sup> (S350GD-Z275)
  - Polyester White** Hot dip galvanised with a minimum coating mass of 150g/m<sup>2</sup> (S350GD-Z150) with 25 micron bright white polyester to the interior surface
- 0.7mm and 0.9mm gauge options available to suit common purlin spacings.
- Maximum sheet lengths up to 12m in packs of 10-35 sheets to suit project specific details

### Profile properties

Nominal Thickness mm	Available Grade N/mm <sup>2</sup>	Depth of Profile mm	Weight kg/m <sup>2</sup>	Weight kN/m <sup>2</sup>	Area of Steel (mm <sup>2</sup> /m)	Top Flange in Compression		Bottom Flange in Compression	
						Moment Capacity kNm/m	Moment of Inertia cm <sup>4</sup> /m	Moment Capacity kNm/m	Moment of Inertia cm <sup>4</sup> /m
0.7	S350	30	6.66	0.07	805	1.45	6.2	1.54	9.5
0.9	S350	30	8.57	0.08	1049	2.19	8.8	2.18	13.2

Section properties are calculated assisted by testing in accordance with Eurocode 3.

# Load tables

## Positive Imposed Load (Gravity) kN/m<sup>2</sup>

Span Condition	Gauge	Span m																
		1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6
Single ▲————▲	0.7	5.00	3.76	2.89	2.28	1.82	1.48	1.22	1.02	0.86	-	-	-	-	-	-	-	-
	0.9	7.10	5.33	4.11	3.23	2.59	2.10	1.73	1.44	1.22	1.03	0.89	-	-	-	-	-	-
Double ▲——▲——▲	0.7	4.50	3.92	3.45	3.06	2.73	2.46	2.03	1.70	1.43	1.21	1.04	0.90	-	-	-	-	-
	0.9	6.92	6.01	5.27	4.66	4.15	3.50	2.89	2.41	2.03	1.72	1.48	1.28	1.11	0.97	-	-	-
Multi ▲▲——▲▲——▲▲	0.7	5.32	4.65	4.10	3.64	3.04	2.47	2.03	1.70	1.43	1.21	1.04	0.90	-	-	-	-	-
	0.9	8.22	7.15	6.28	5.38	4.31	3.50	2.89	2.41	2.03	1.72	1.48	1.28	1.11	0.97	-	-	-

## Negative Imposed Load (Uplift) kN/m<sup>2</sup>

Span Condition	Gauge	Span m																
		1.0	1.1	1.2	1.3	1.4	1.5	1.6	1.7	1.8	1.9	2.0	2.1	2.2	2.3	2.4	2.5	2.6
Single ▲————▲	0.7	8.00	6.79	5.70	4.86	4.19	3.65	3.21	2.84	2.53	2.28	2.05	1.86	1.70	1.50	1.32	1.17	1.04
	0.9	11.63	9.61	8.07	6.88	5.93	5.17	4.54	4.02	3.59	3.22	2.91	2.57	2.24	1.96	1.72	1.53	1.36
Double ▲——▲——▲	0.7	4.38	3.81	3.35	2.97	2.65	2.38	2.15	1.96	1.79	1.64	1.51	1.39	1.29	1.20	1.12	1.04	0.98
	0.9	6.94	6.02	5.28	4.67	4.16	3.74	3.37	3.06	2.79	2.56	2.35	2.17	2.01	1.86	1.74	1.62	1.52
Multi ▲▲——▲▲——▲▲	0.7	5.19	4.52	3.98	3.54	3.16	2.85	2.58	2.35	2.15	1.97	1.82	1.68	1.56	1.45	1.35	1.26	1.18
	0.9	8.24	7.17	6.30	5.58	4.99	4.48	4.05	3.68	3.36	3.08	2.84	2.62	2.43	2.26	2.10	1.97	1.84

Tables consider deflection limits of:-

- Positive load (Gravity) - Span /200
- Negative loads (Uplift) - Span /90

Figures shaded indicate where design is governed by deflection

All loads within table consider a partial factor of 1.5

Fixing checks for uplift must be considered separately

Tables based on bearing width (purlin) of 60mm

Download the latest version, now with roof deck design capability



Watch SMD's YouTube tutorial on the new roof deck section of Elements



[www.smdstockyards.co.uk](http://www.smdstockyards.co.uk)

**Brentwood** London  
Tel: +44 (0) 1277 812490  
Email: [alan@smdstockyards.co.uk](mailto:alan@smdstockyards.co.uk)  
Unit 27, Childerditch Industrial Park,  
Little Warley, Essex CM13 3HD  
Fax: +44 (0) 1277 812491

**Ashbourne** Midlands  
Tel: +44 (0) 1335 300999  
Email: [jade@smdstockyards.co.uk](mailto:jade@smdstockyards.co.uk)  
Moor Farm Road West, The Airfield,  
Ashbourne, Derbyshire DE6 1HD  
Fax: +44 (0) 1335 300888

**Leeds** Northern  
Tel: +44 (0) 1202 714990  
Email: [kevin@smdstockyards.co.uk](mailto:kevin@smdstockyards.co.uk)  
Calderbank, River Street, Brighouse,  
West Yorkshire HD6 1LU  
Fax: +44 (0) 1202 714980

**Coatbridge** Scotland  
Tel: +44 (0) 1698 622202  
Email: [kevin@smdstockyards.co.uk](mailto:kevin@smdstockyards.co.uk)  
12 Palacecraig Street, Coatbridge,  
North Lanarkshire ML5 4RY  
Fax: +44 (0) 1202 714980